


Ceiling recessed downlight

PS-BL19-28W

Reflector



Technical Parameters

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	700mA (35-37V)
Rated life:	>50,000 hours
Operating temperature:	-20°-40°
Storage temperature:	-30°-60°
Certificate:	CE/ROHS
Dimmability:	Dimmable Optional
Weight:	1.5KG
Warranty	5 Years





Ordering Information

⓪ White+Grey

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
28W	>80	▲60°	2290 lm	3000K	⓪	PS-BL191-28W-830-W-60
			2315 lm	4000K	⓪	PS-BL191-28W-840-W-60
	>90	▲60°	2400 lm	3000K	⓪	PS-BL191-28W-850-W-60
			2375 lm	4000K	⓪	PS-BL191-28W-930-W-60

Technical Data test pattern

28W	CRI>80			CRI>90		
	LED			Luminaire	LED	Luminaire
Power	24.9W			26.4W	24.9W	26.4W
Current	720mA			700mA	720mA	700mA
Flux	3586lm	3697lm	3794lm	2290lm	2962lm	2375lm
CCT	3000K	4000K	5000K	3000K	3000K	3000K
Color tolerance	3 SDCM				3 SDCM	
Service life	>50000Hrs			>50000Hrs	>50000Hrs	>50000Hrs
Beam Angle	120°			60°	120°	60°
Typical Efficiency				86%		86%
Efficacy(lm/W)	144	148	150	86	119	89

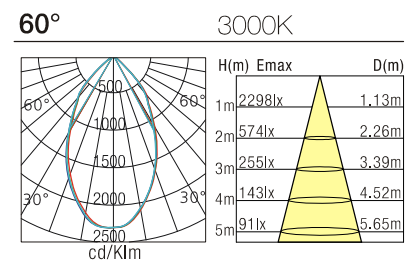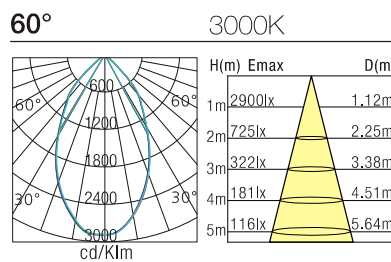


Ceiling recessed downlight

PS-BL191-40W

Reflector



200-210



Technical Parameters

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	1000mA (35-37V)
Rated life:	>50,000 hours
Operating temperature:	-20°-40°
Storage temperature:	-30°-60°
Certificate:	CE/ROHS
Dimmability:	Dimmable Optional
Weight:	1.6KG
Warranty	5 Years




Ordering Information

⊙ White+Grey


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
40W	>80	▲60°	4380 lm	3000K	⊙	PS-BL191-40W-830-W-60
			4420 lm	4000K	⊙	PS-BL191-40W-840-W-60
	>90	▲60°	3620 lm	3000K	⊙	PS-BL191-40W-930-W-60
			3950 lm	4000K	⊙	PS-BL191-40W-940-W-60

Technical Data test pattern


CRI80 60°

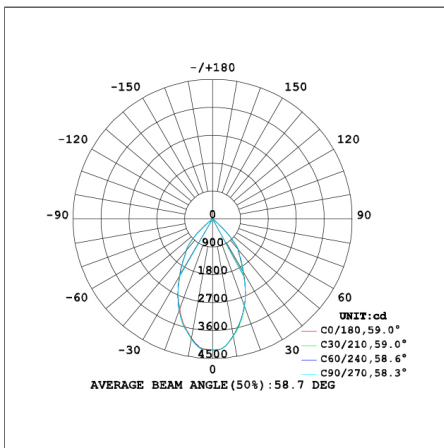


3000K

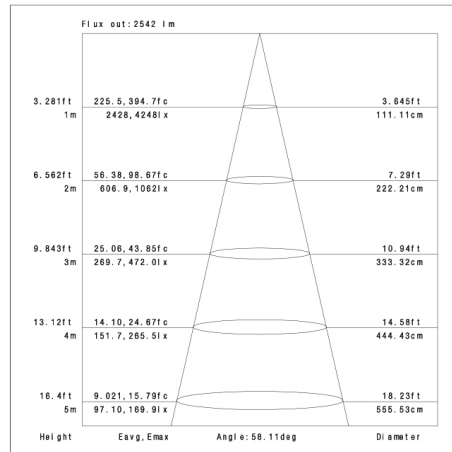


4000K

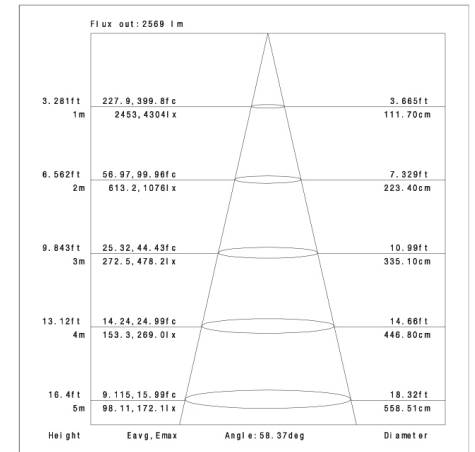

CRI90 60°

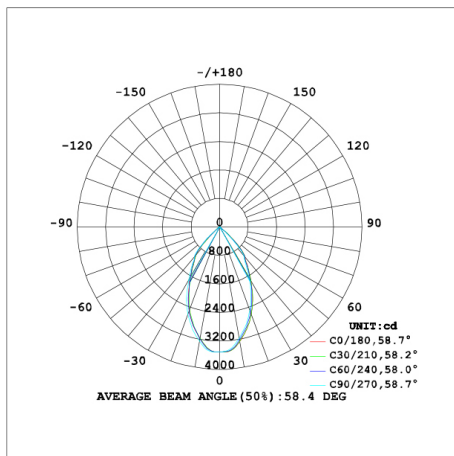

3000K

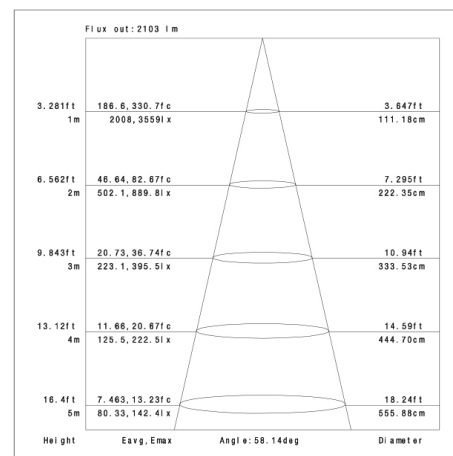

4000K

