


Ceiling recessed downlight

PS-BL27-10W



125-130

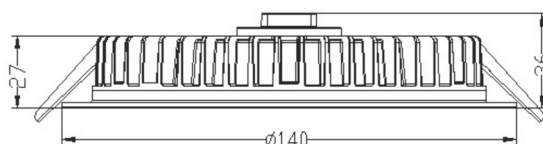




Technical Parameters

Name	Parameters
Light source:	2835 SMD (56pcs)
Input Voltage:	AC220~240V 50/60Hz
LED Current:	350mA (24V)
Rated life:	>50,000 hours
Operating temperature:	-20°-40°
Storage temperature:	-30°-60°
Certificate:	CE/ROHS
Dimmability:	Dimmable Optional
Weight:	0.3KG
Warranty:	5 Years



Ordering Information:

White+Black




Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
10W	>80	 90°	970 lm	3000K		PS-BL272-10W-830-W-90
			1010 lm	4000K		PS-BL272-10W-840-W-90

Technical Data test pattern

CRI80 90°

3000K

4000K

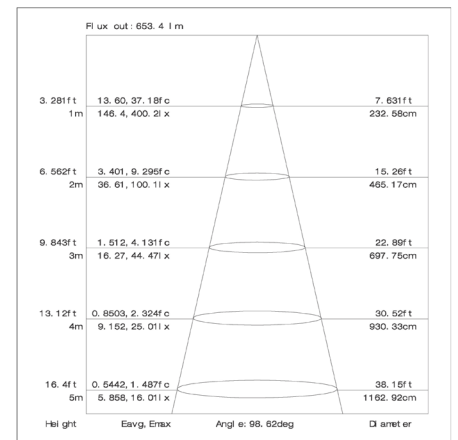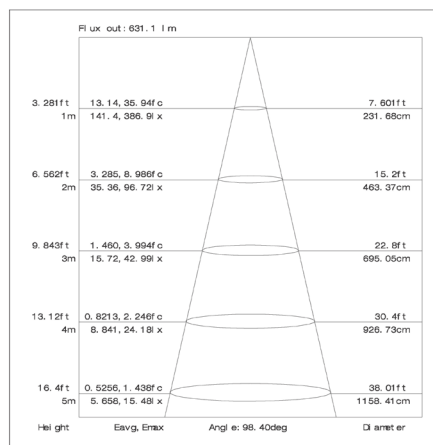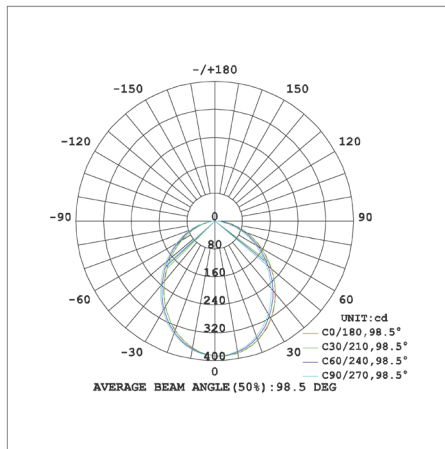


Ceiling recessed downlight

PS-BL28-20W



165-170

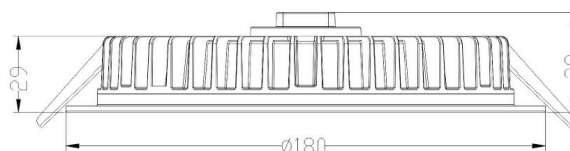




Technical Parameters

Name	Parameters
Light source:	2835 SMD (108pcs)
Input Voltage:	AC220~240V 50/60Hz
LED Current:	500mA (36V)
Rated life:	>50,000 hours
Operating temperature:	-20°-40°
Storage temperature:	-30°-60°
Certificate:	CE/ROHS
Dimmability:	Dimmable Optional
Weight:	0.55KG
Warranty	5 Years




Ordering Information

● White+Black


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
20W	>80	 90°	2050 lm	3000K		PS-BL282-20W-830-W-90
			2120 lm	4000K		PS-BL282-20W-840-W-90

Technical Data test pattern

CRI80 90°

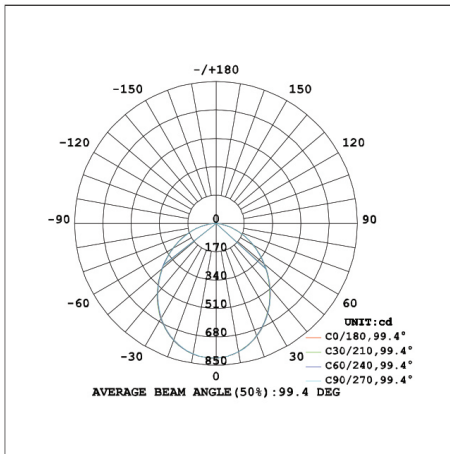

3000K

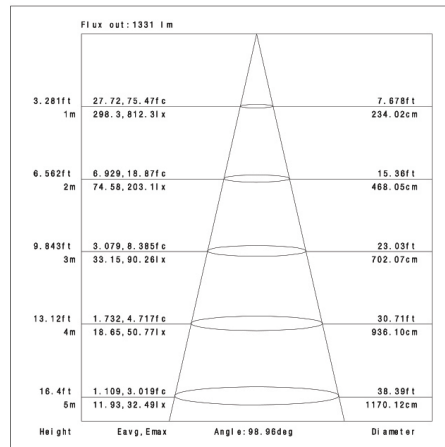

4000K

