

Ceiling recessed spotlight

W<21-28W



Technical Parameters

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	700mA
Rated life:	>50,000 hours
Working temperature:	-20°-40°
Storage temperature:	-30°-60°
CE/ROHS	CE/ROHS
Weight:	0.9KG
Warranty:	5 Years




Ordering Information:

○ White ● Black


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
28W	>80	▲15°	2855 lm	3000K	○ ●	PS-DL211-28W-830-W-15 PS-DL211-28W-830-B-15
			2985 lm	4000K	○ ●	PS-DL211-28W-840-W-15 PS-DL211-28W-840-B-15
		▲24°	2850 lm	3000K	○ ●	PS-DL211-28W-830-W-24 PS-DL211-28W-830-B-24
			2950 lm	4000K	○ ●	PS-DL211-28W-840-W-24 PS-DL211-28W-840-B-24
		▲40°	2820 lm	3000K	○ ●	PS-DL211-28W-830-W-40 PS-DL211-28W-830-B-40
			2940 lm	4000K	○ ●	PS-DL211-28W-840-W-40 PS-DL211-28W-840-B-40
	>90	▲15°	2420 lm	3000K	○ ●	PS-DL211-28W-930-W-15 PS-DL211-28W-930-B-15
			2530 lm	4000K	○ ●	PS-DL211-28W-940-W-15 PS-DL211-28W-940-B-15
		▲24°	2410 lm	3000K	○ ●	PS-DL211-28W-930-W-24 PS-DL211-28W-930-B-24
			2520 lm	4000K	○ ●	PS-DL211-28W-940-W-24 PS-DL211-28W-940-B-24
		▲40°	2340 lm	3000K	○ ●	PS-DL211-28W-930-W-40 PS-DL211-28W-930-B-40
			2510 lm	4000K	○ ●	PS-DL211-28W-940-W-40 PS-DL211-28W-940-B-40

Dimensions:

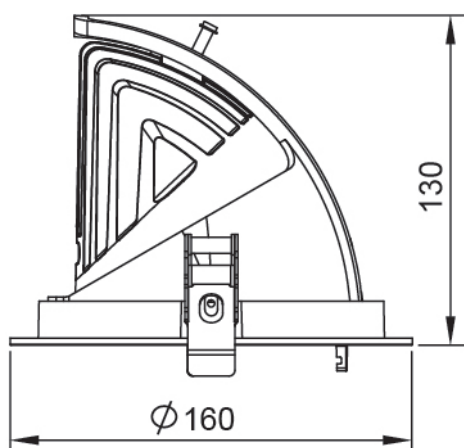





CRI80 15°

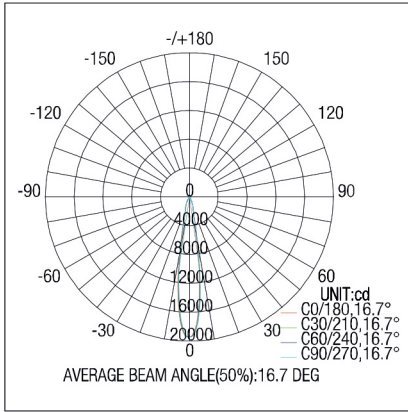


3000K

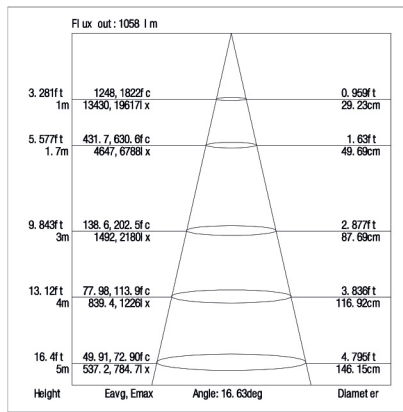


4000K

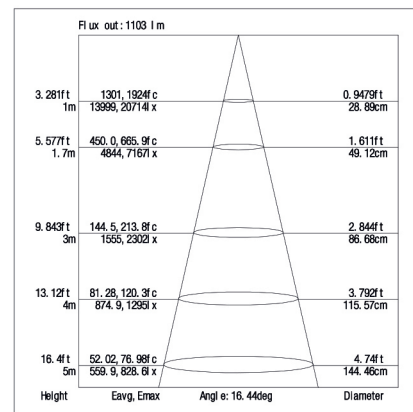


CRI80 24°

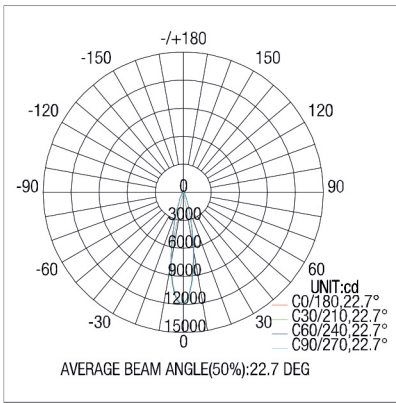


3000K

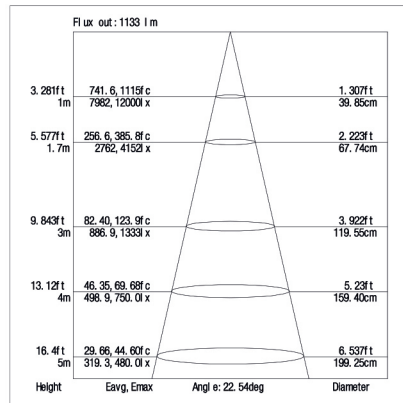


4000K

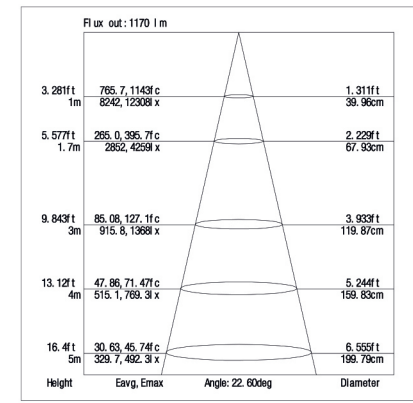


CRI80 40°

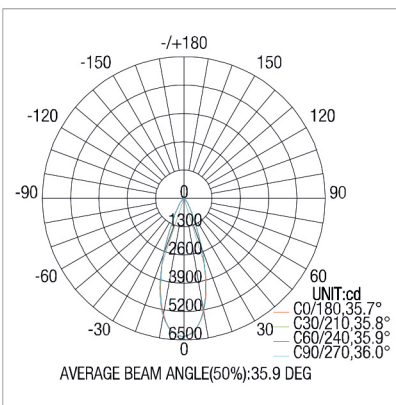

3000K

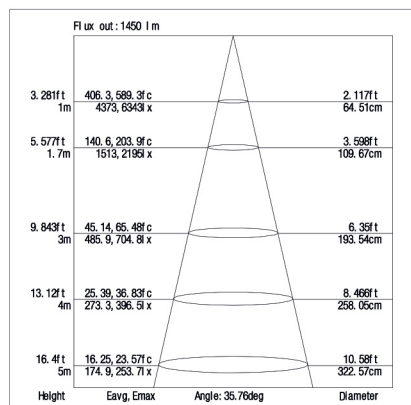


4000K

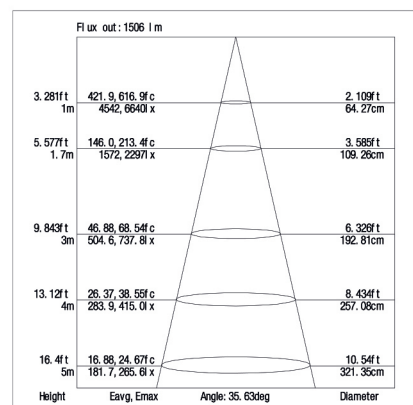





CRI90 15°

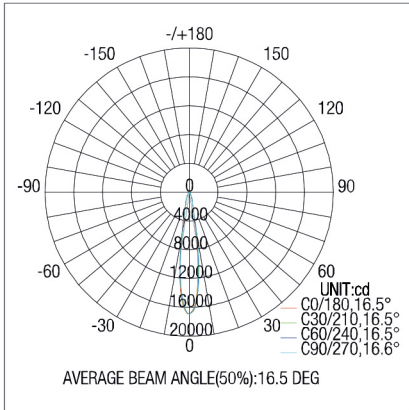


3000K

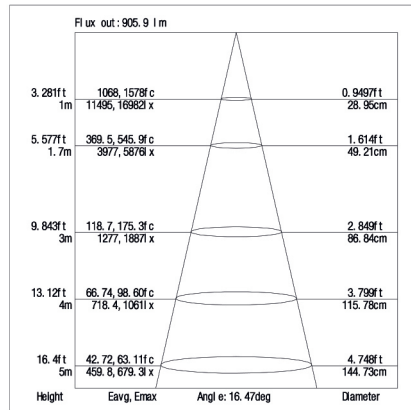


4000K

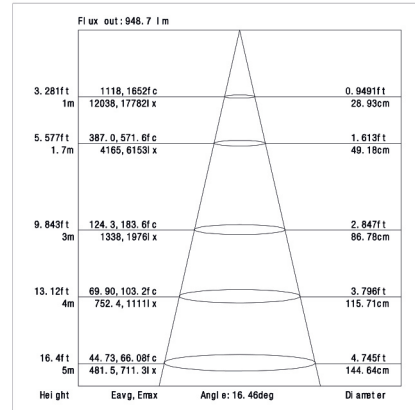


CRI90 24°

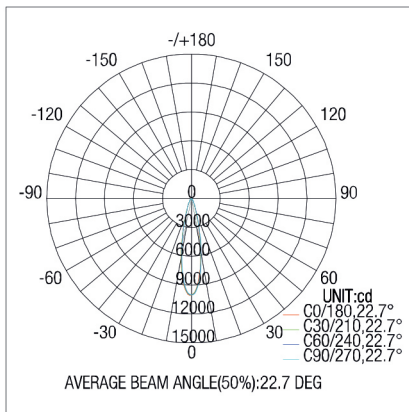


3000K

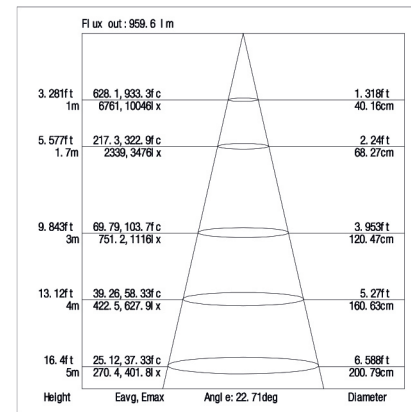


4000K

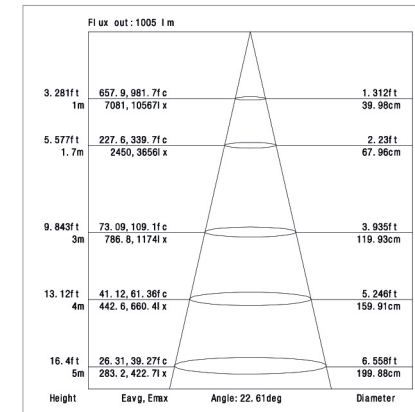

CRI90 40°

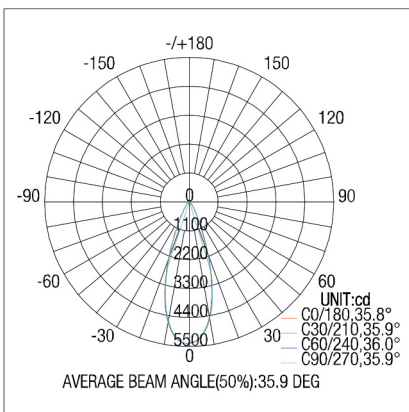

3000K

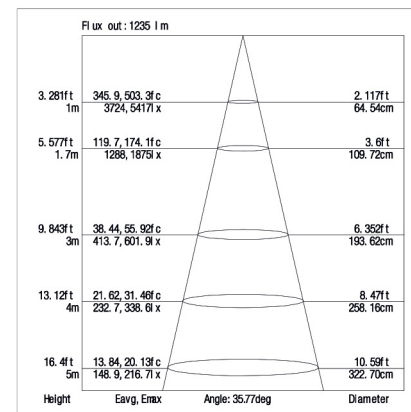

4000K

