






Ceiling recessed LED spotlight

PS-GL1011-1x20W

Reflector



165X165mm



Technical Parameters

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	500mA (35-37V)
Rated life:	>50,000 hours
Operating temperature:	-20°-40°
Storage temperature:	-30°-60°
Certificate:	TUV/CE/RoHS
Dimmability:	Dimmable Optional
UGR	<16
IP rating	IP20
Weight:	1.0KG
Warranty	5 Years



Ordering Information

White+Black




Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
1x20W	>80	10°	2040 lm	3000K	☉	PS-GL1011-20W-830-W-10
			2050 lm	4000K	☉	PS-GL1011-20W-840-W-10
		20°	2060 lm	3000K	☉	PS-GL1011-20W-830-W-20
			2060 lm	4000K	☉	PS-GL1011-20W-840-W-20
		38°	2050 lm	3000K	☉	PS-GL1011-20W-830-W-38
			2040 lm	4000K	☉	PS-GL1011-20W-840-W-38
	>90	10°	1730 lm	3000K	☉	PS-GL1011-20W-930-W-10
			1870 lm	4000K	☉	PS-GL1011-20W-940-W-10
		20°	1750 lm	3000K	☉	PS-GL1011-20W-930-W-20
			1900 lm	4000K	☉	PS-GL1011-20W-940-W-20
		38°	1750 lm	3000K	☉	PS-GL1011-20W-930-W-38
			1890 lm	4000K	☉	PS-GL1011-20W-940-W-38

Technical Data test pattern

CRI80 10°


3000K

4000K

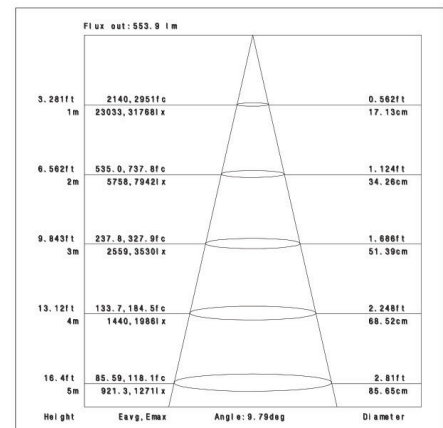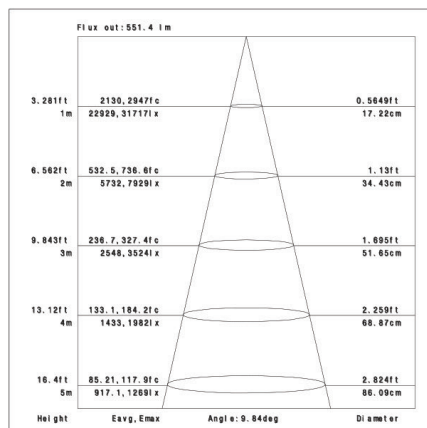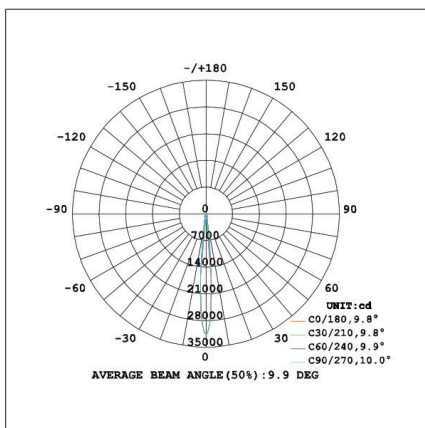





CRI80 20°

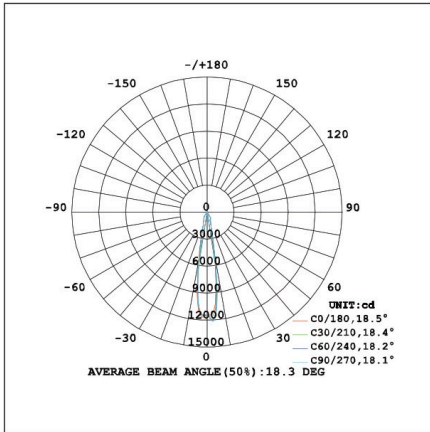


3000K

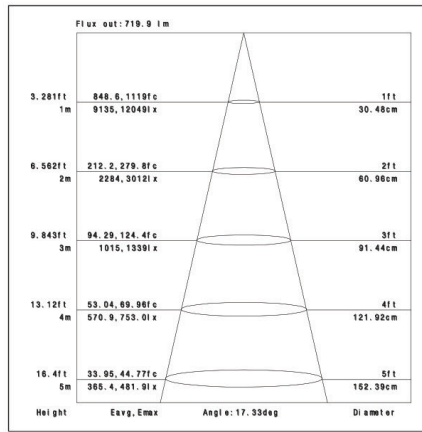


4000K

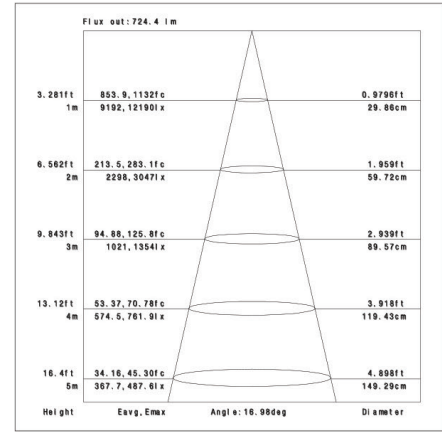


CRI80 38°

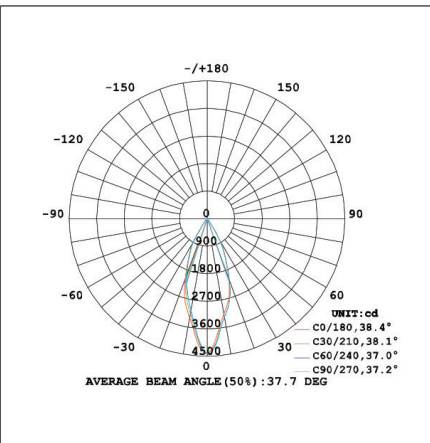


3000K

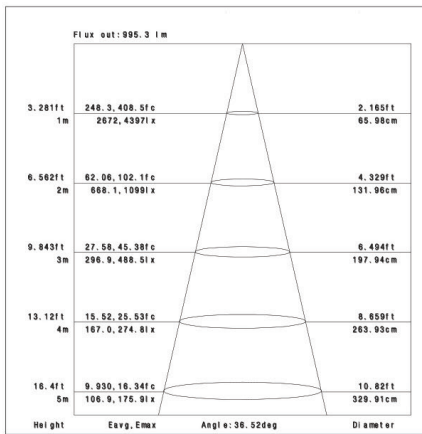


4000K

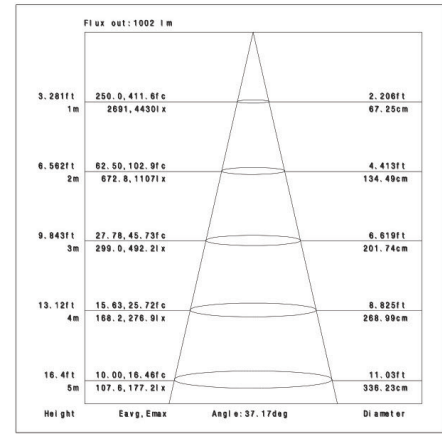


CRI90 10°

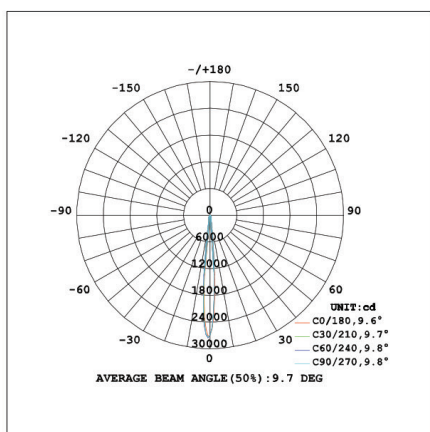

3000K

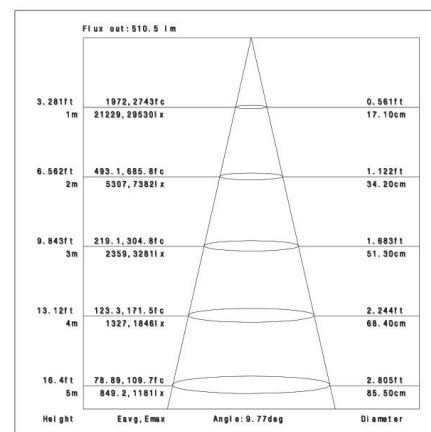


4000K

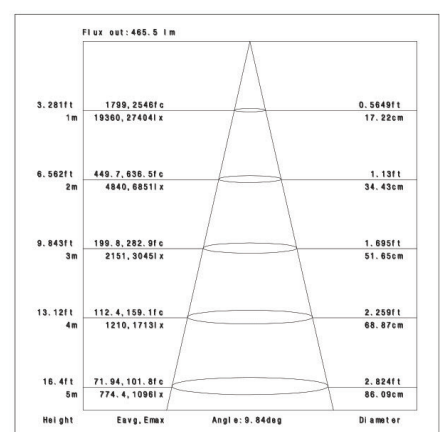





CRI90 20°

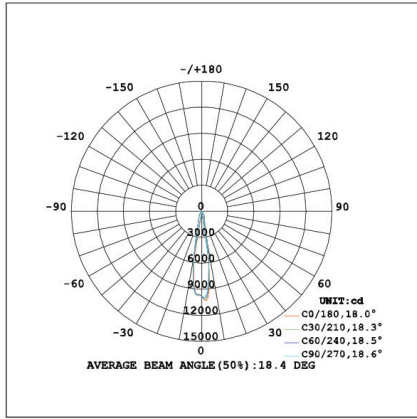


3000K

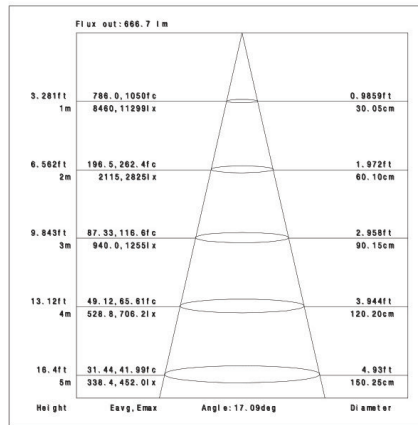


4000K

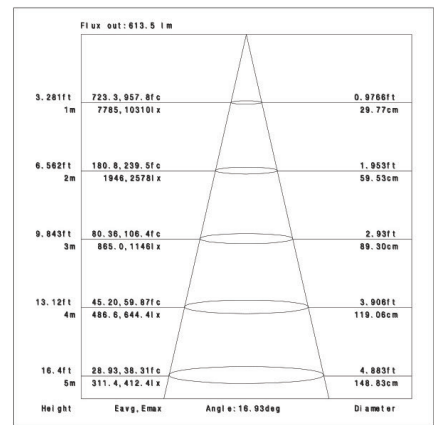

CRI90 38°

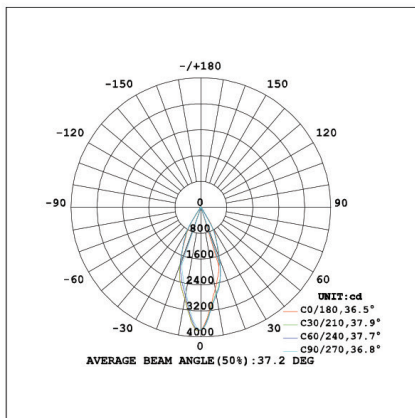

3000K

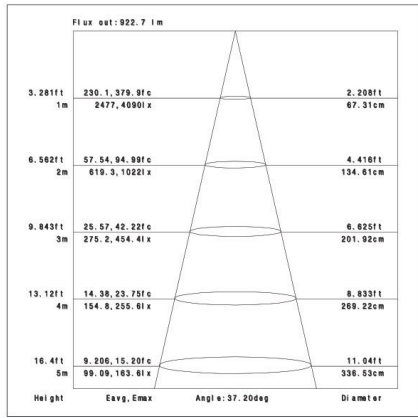

4000K

