




LED track light

PS-TL29-15W

Optical lens

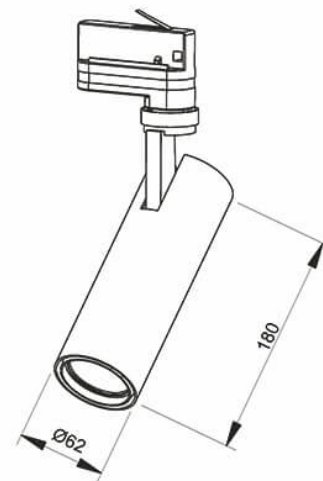

Technical Parameters

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	700mA, 35-37V
Rated life:	>50,000 hours
Operating temperature:	-20°-40°
Storage temperature:	-30°-60°
Certificate:	CE/RoHS
Weight:	0.64KG
Warranty	5 Years



Ordering Information


○ White ● Black

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
15W	>80	▲16°	1370 lm	3000K	○	PS294-15W-830-W-16
					●	PS294-15W-830-B-16
			1390 lm	4000K	○	PS294-15W-840-W-16
					●	PS294-15W-840-B-16
		▲24°	1560 lm	3000K	○	PS294-15W-830-W-24
					●	PS294-15W-830-B-24
			1620 lm	4000K	○	PS294-15W-840-W-24
					●	PS294-15W-840-B-24
		▲36°	1630 lm	3000K	○	PS294-15W-830-W-36
					●	PS294-15W-830-B-36
			1680 lm	4000K	○	PS294-15W-840-W-36
					●	PS294-15W-840-B-36
	>90	▲16°	1150 lm	3000K	○	PS294-15W-930-W-16
					●	PS294-15W-930-B-16
			1280 lm	4000K	○	PS294-15W-940-W-16
					●	PS294-15W-940-B-16
		▲24°	1300 lm	3000K	○	PS294-15W-930-W-24
					●	PS294-15W-930-B-24
			1450 lm	4000K		PS294-15W-940-W-24
		▲36°	1370 lm	3000K	○	PS294-15W-930-W-36
					●	PS294-15W-930-B-36
			1530 lm	4000K		PS1294-15W-940-W-36
					●	PS294-15W-940-B-36




Technical Data test pattern


CRI80 16°

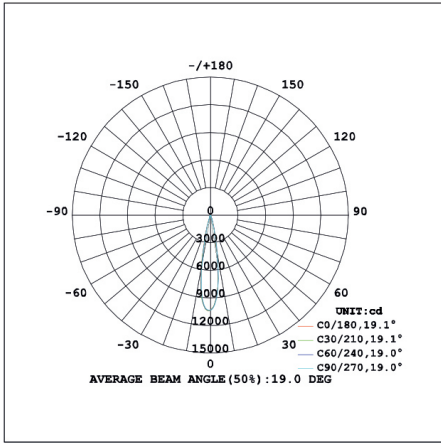


3000K

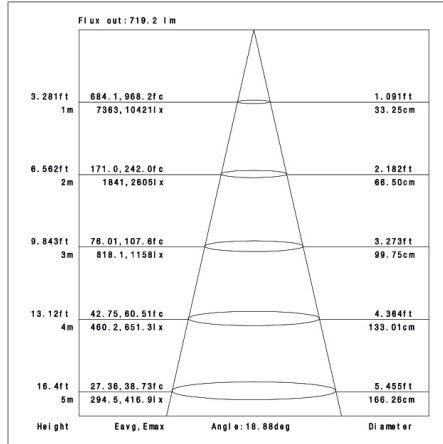


4000K

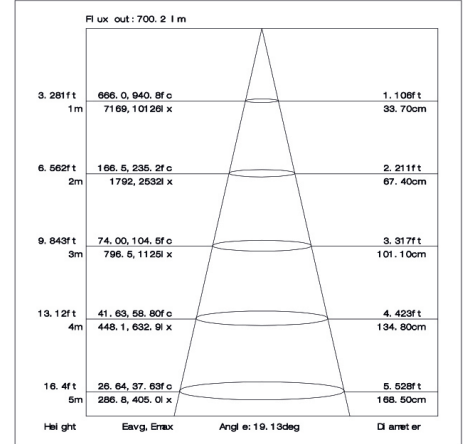


CRI80 24°

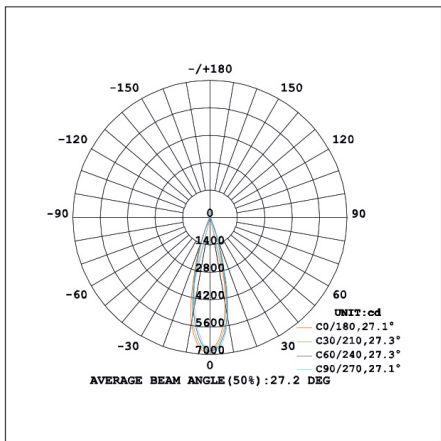


3000K

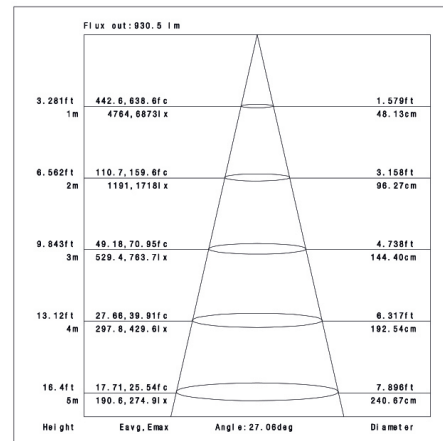


4000K

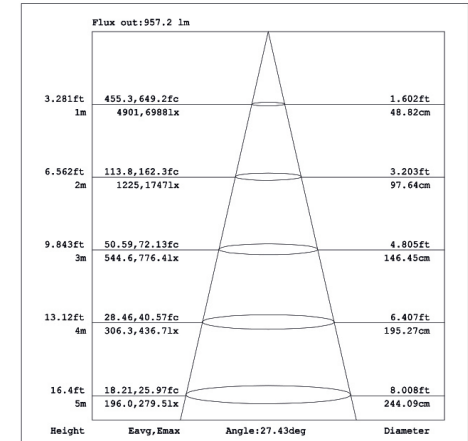


CRI80 36°

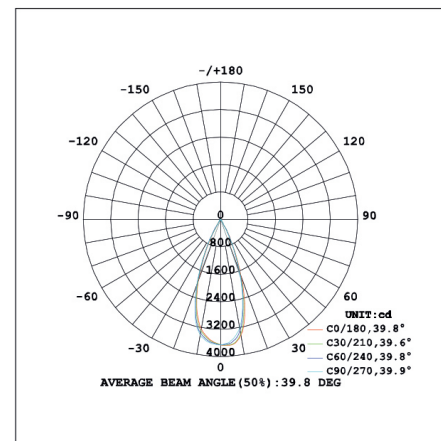

3000K

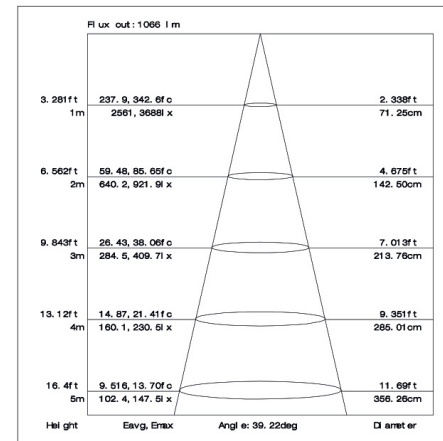


4000K

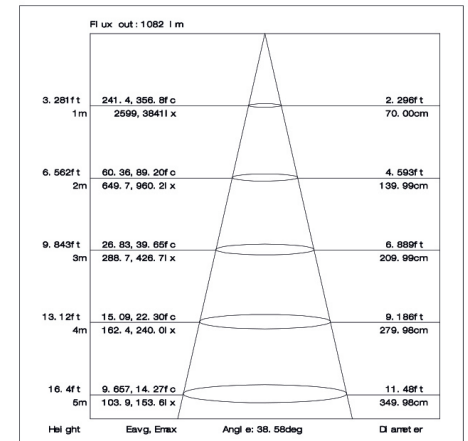





CRI90 16°

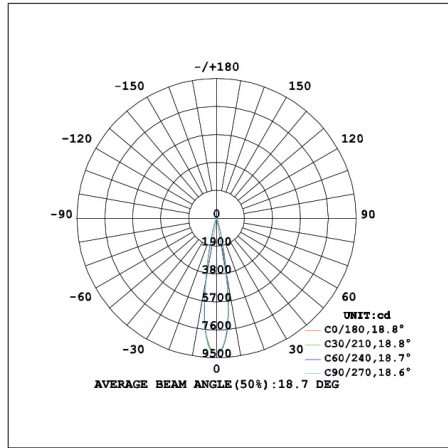


3000K

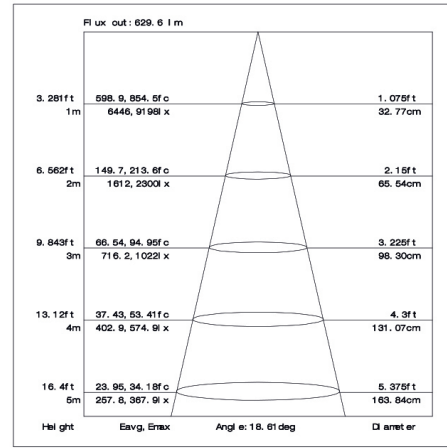


4000K

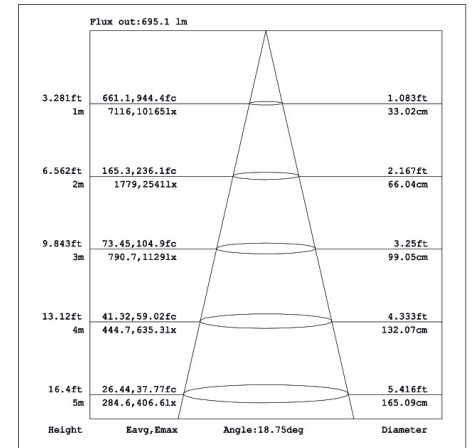


CRI90 24°

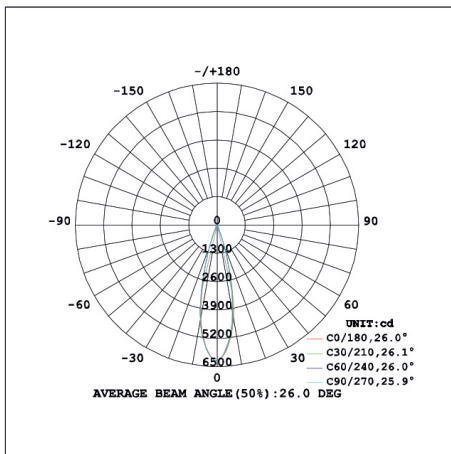


3000K

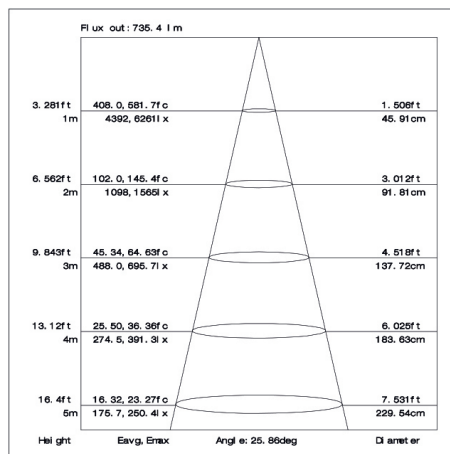


4000K

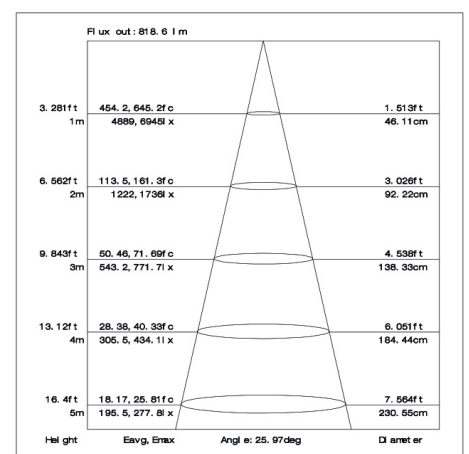

CRI90 36°

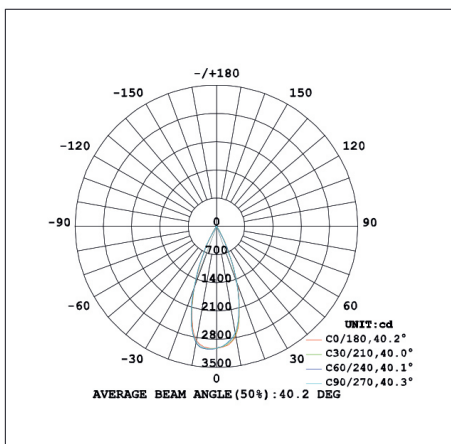

3000K

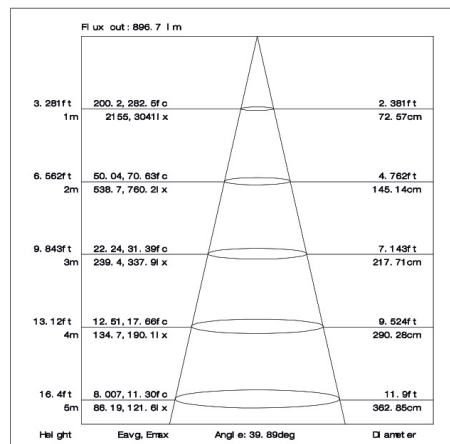

4000K

