

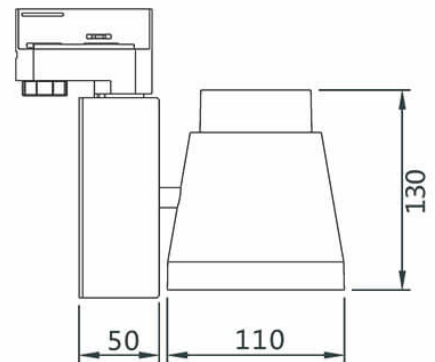


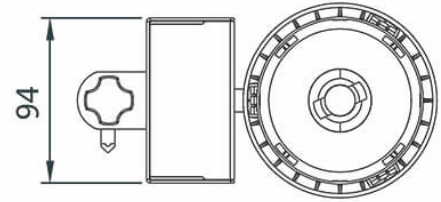

LED track light

PS-TL32-30W

Reflector

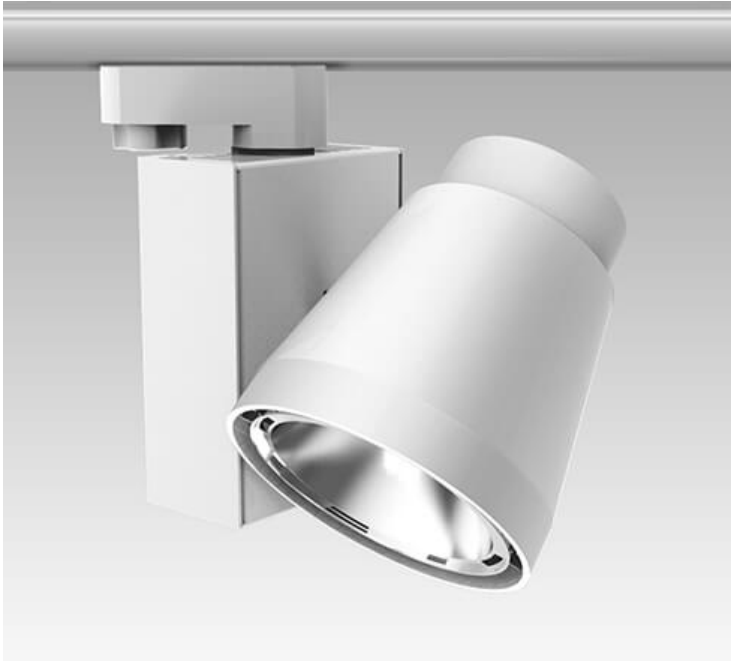

Technical Parameters

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	700mA, 35-37V
Rated life:	>50,000 hours
Operating temperature:	-20°-40°
Storage temperature:	-30°-60°
Certificate:	CE/RoHS
Weight:	1.25KG
Warranty	5 Years



Ordering Information


O White ● Black

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
30W	>80	▲15°	2980 lm	3000K	O	PS-TL324-30W-830-W-15
					●	PS-TL324-30W-830-B-15
			3160 lm	4000K	O	PS-TL324-30W-840-W-15
					●	PS-TL324-30W-840-B-15
		▲20°	3010 lm	3000K	O	PS-TL324-30W-830-W-20
					●	PS-TL324-30W-830-B-20
			3250 lm	4000K	O	PS-TL324-30W-840-W-20
					●	PS-TL324-30W-840-B-20
		▲45°	2990 lm	3000K	O	PS-TL324-30W-830-W-45
					●	PS-TL324-30W-830-B-45
			3190 lm	4000K	O	PS-TL324-30W-840-W-45
					●	PS-TL324-30W-840-B-45
	>90	▲15°	2670 lm	3000K	O	PS-TL324-30W-930-W-15
					●	PS-TL324-30W-930-B-15
			2810 lm	4000K	O	PS-TL324-30W-940-W-15
					●	PS-TL324-30W-940-B-15
		▲20°	2700 lm	3000K	O	PS-TL324-30W-930-W-20
					●	PS-TL324-30W-930-B-20
			2830 lm	4000K		PS-TL324-30W-940-W-20
		▲45°	2680 lm	3000K	O	PS-TL324-30W-930-W-45
					●	PS-TL324-30W-930-B-45
			2810 lm	4000K		PS-TL324-30W-940-W-45
					●	PS-TL324-30W-940-B-45




Technical Data test pattern


CRI80 15°

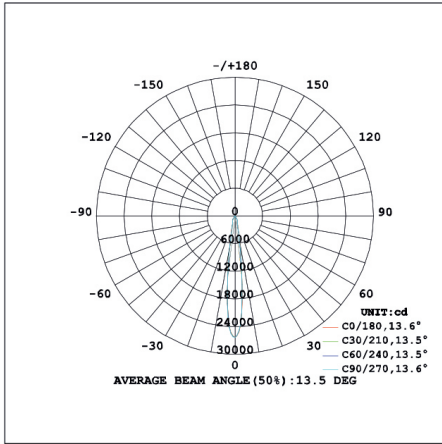


3000K

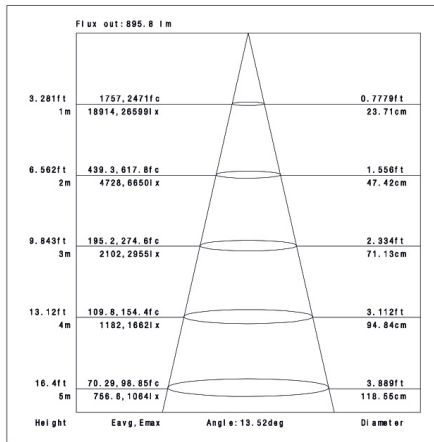


4000K

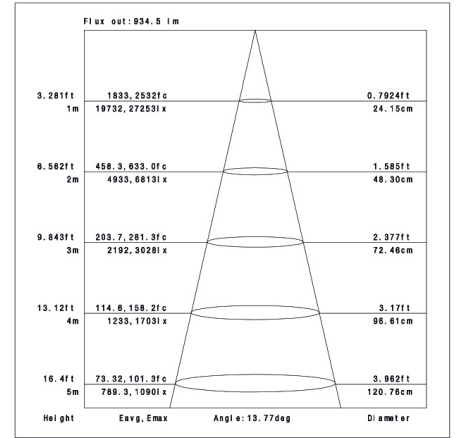


CRI80 20°

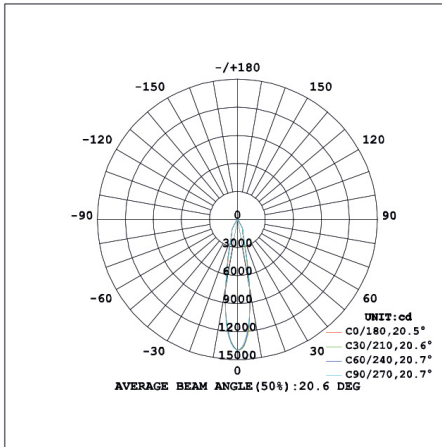


3000K

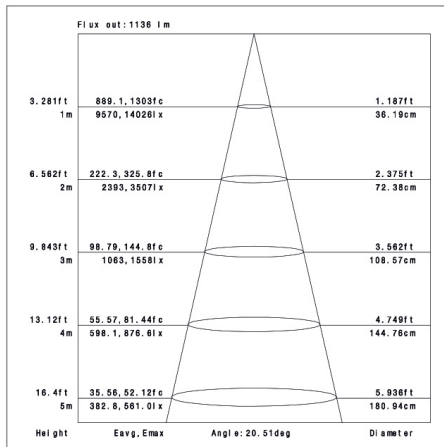


4000K

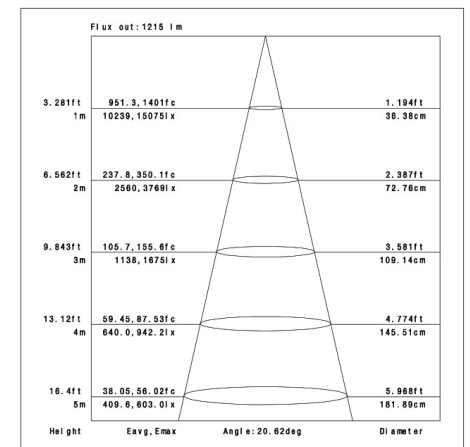


CRI80 45°

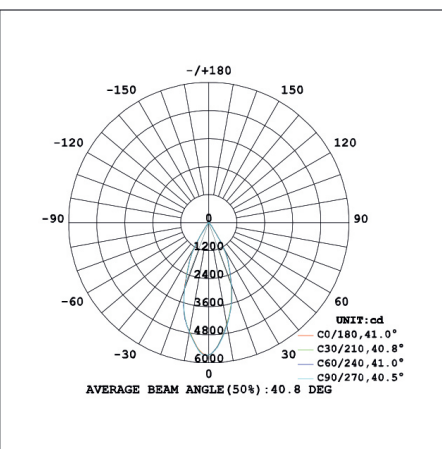

3000K

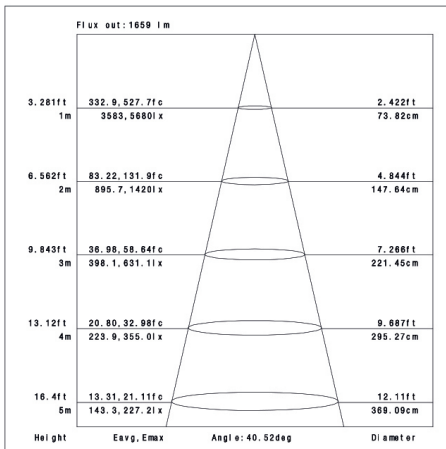


4000K

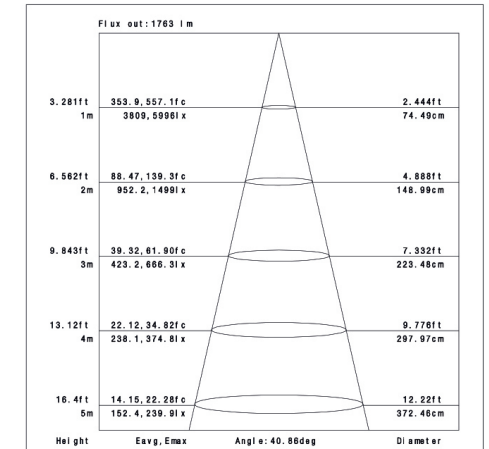





CRI90 15°

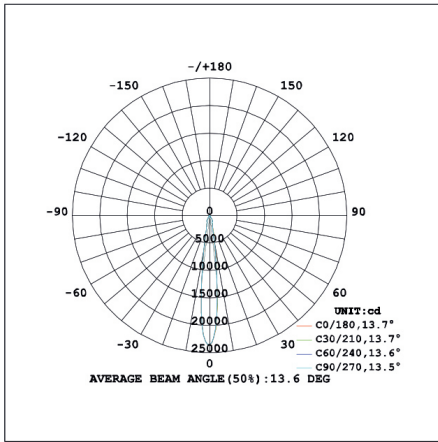


3000K

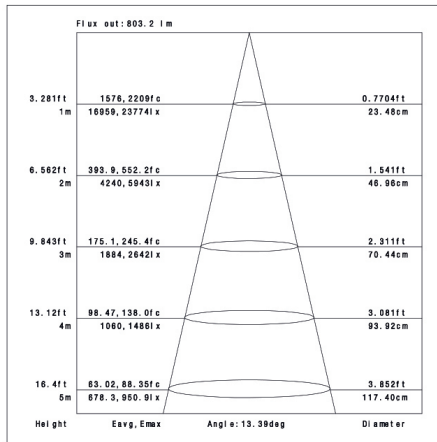


4000K

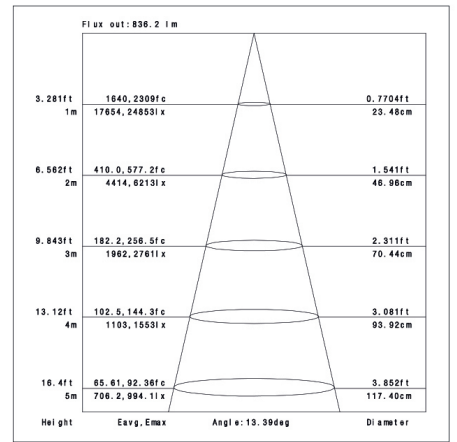


CRI90 20°

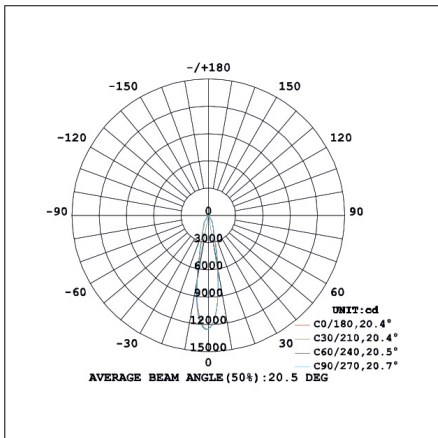


3000K

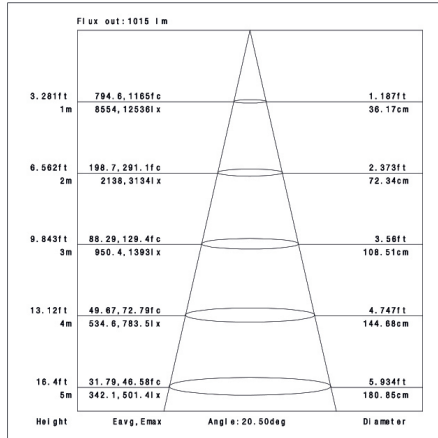


4000K

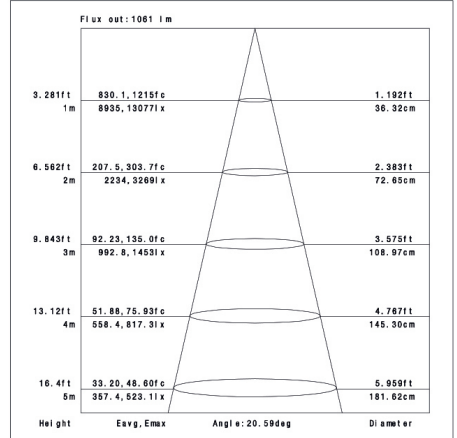

CRI90 45°

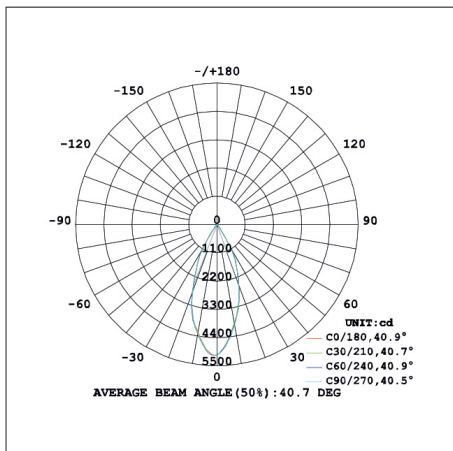

3000K

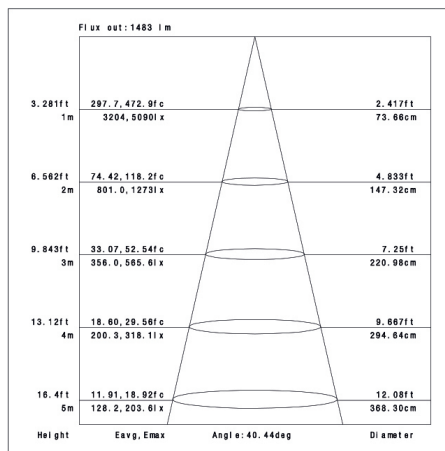

4000K

